


TECHNICAL TEXTILES  
产业用纺织品

## WEFTTRONIC® II HKS

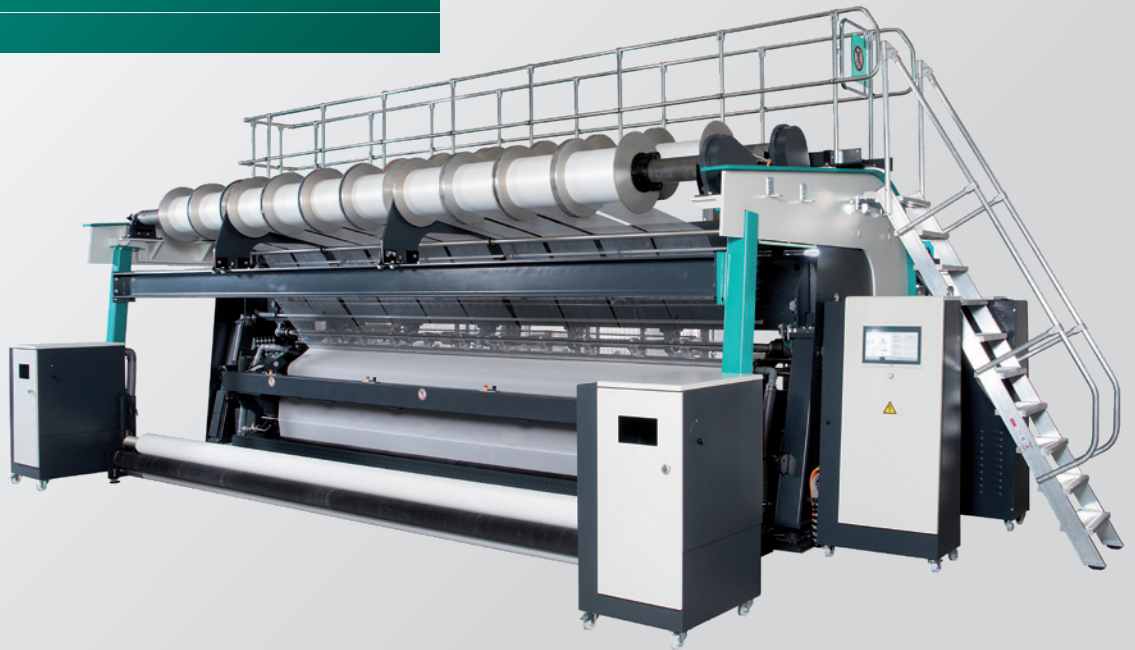

### High-performance warp-knitting machine with course-oriented weft-insertion system for the production of lightweight fabrics


带有平行铺纬系统的高性能经编机，纬纱与线圈横列相对应，适用于生产轻质面料

#### Your benefit

- High productivity
- High application variety
- Available with carbon bars for a stable processing even with temperature fluctuations

#### 您的优势

- 更高的生产力
- 更广的应用范围
- 碳纤维梳栉在温度波动的状态下也能保证稳定的生产

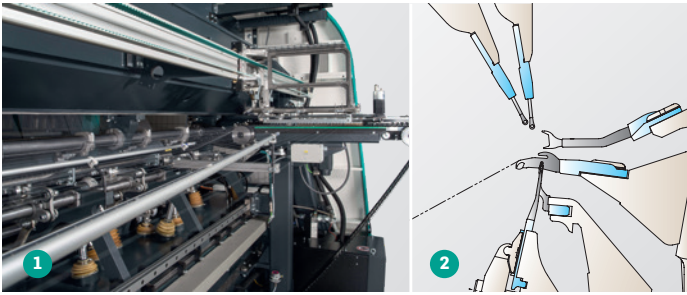

- 1 Weft-insertion system  
铺纬系统
- 2 Knitting area  
成圈区

## Product features

### 产品特点

- Production of very delicate fabrics for interlining or other lightweight coating applications
- Medium to high stitch density
- Wide range of yarns in terms of type and yarn count
- 生产服装衬里或者其他轻质涂层基布的精细面料
- 线圈密度从中到高
- 适应多种类型和细度的纱线

## Technical facts

### 技术参数

Working width 工作门幅	138", 184", 213", 245" (for all widths 2" extension possible) 138", 184", 213", 245" (所有幅宽均可扩展2")
Working width reduction 工作宽度可调	184", 213", 245" up to 60" 138" up to 50" 184", 213", 245"最小可缩至60" 138"最小可缩至50"
Gauges 机号	E 24, E 28, E 32, E 36, E 40 – other gauges on request E 24, E 28, E 32, E 36, E 40 – 其他机号根据需求
Weft-insertion system 铺纬系统	Yarn laying carriage with 24 ends 可携带24根纱线的铺纬小车
No. of warp beams / guide bars 经轴/梳栉数量	One or two guide bars – max. 32" flange diameter for warp beams 1或2把地梳- 可用边盘直径最大为32英寸的盘头
Pattern drive 花型驱动装置	Pattern disc 花盘
Take-up device 牵拉装置	Four-roller system 4罗拉系统
Batching device 卷取装置	Batching system with surface winding 表面摩擦卷取
Optional 选配	Knitting area with carbon bars, weft creel with pre-winders 碳纤维床体, 纱架上的预卷绕器

