




KARL MAYER

WE CARE ABOUT YOUR FUTURE

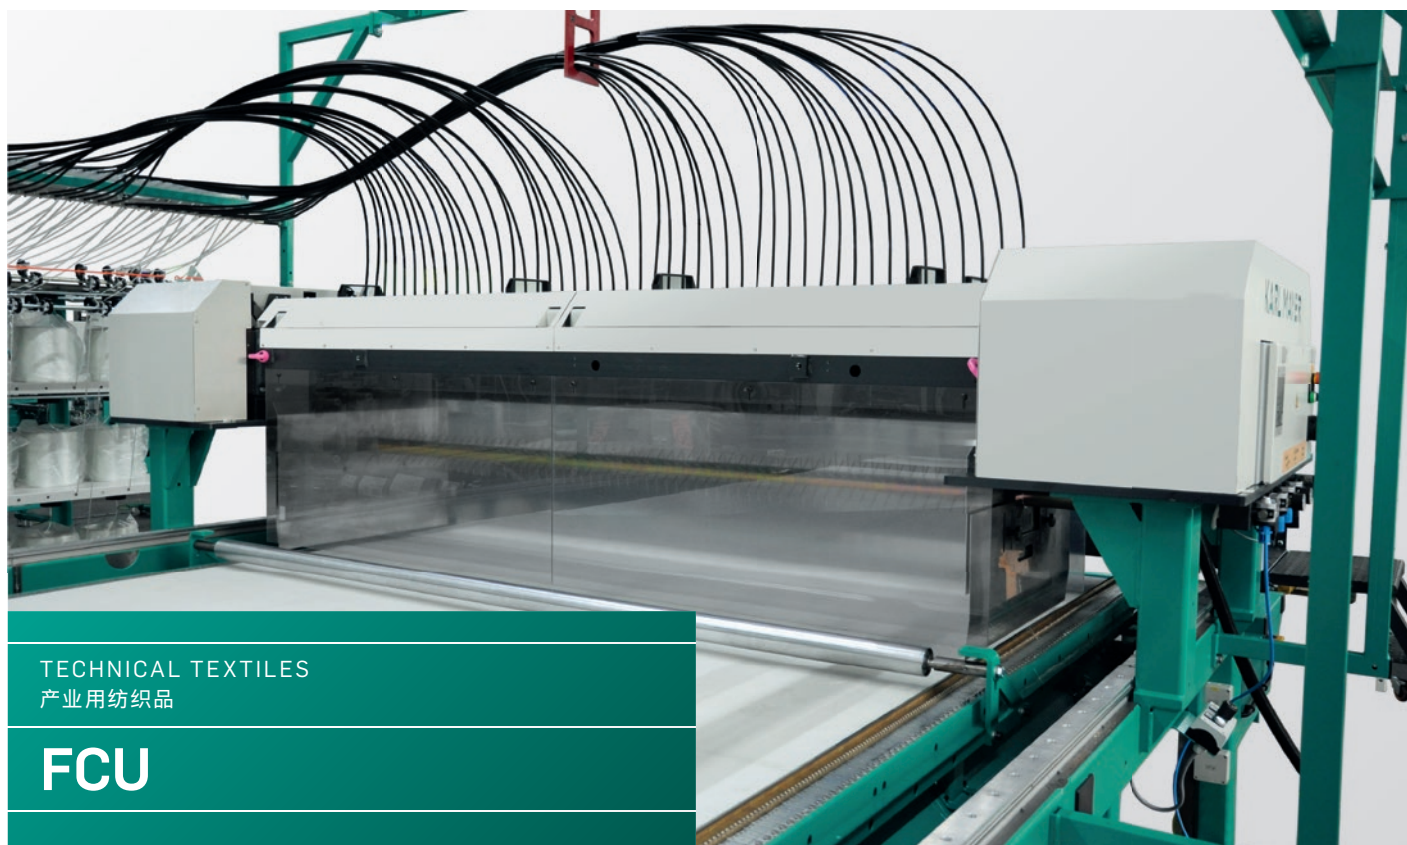

TECHNICAL TEXTILES
产业用纺织品

FCU


High-performance fibre-chopping unit for the production of chopped-strands mat 生产短切毡的高性能短切装置

Your benefit

- High quality standards
- Intergrated system
- Modular and flexible concept

您的优势

- 高质量标准
- 集成系统
- 灵活、模块化的理念

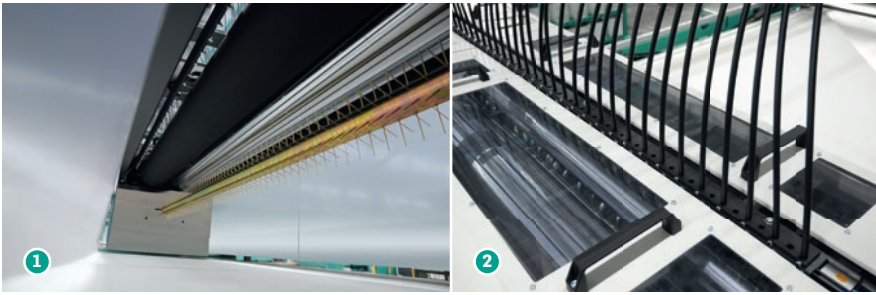

1 Cut-fibre distribution
短切纤维分散系统

2 Fibre-guiding tubes
导纱管

Product features

产品特点

- For use on multiaxial and biaxial machines
 - Fibre-chopping unit for cutting of glass fibre rovings
 - Production of chopped-strands mat
 - Integration in KARL MAYER operator interface
 - Adjustable cutting length of 50 mm or 100 mm
- 用于多轴向、双轴向机器
 - 玻璃纤维粗纱短切装置
 - 生产短切毡
 - 可集成到卡尔迈耶操作系统
 - 短切长度50mm或100mm

Technical facts

技术参数

Working width 工作门幅	max. 103", other working width on request 最大103英寸, 其他工作门幅根据需求
Fabric weight 短切毡克重	50-750 gsm 50-750 克/平米
No. of yarns 纱线头份	max. 102 最多102根
Standard equipment 标配	Antistatic system Blowout device Wrap control for roving pressure roller 抗静电装置 吹风系统 短切纱送经压辊
Options 选配	Fibre-guiding tubes Pressure roller for the machine Roving creel Operating platform 导纱管 短切毡压辊 纱架 操作平台

